

# TAMPER-PROOF THERMOSTAT (NO)

FTS 011 | 01161.0-02



The NO thermostat closes when the temperature rises and is used to control filter fans, heat exchangers, cooling devices or to switch signal transmitters when the temperature is exceeded. The temperature is permanently set. This gives you a high switching accuracy.

- Small dimensions
- Fixed temperature setting
- High switching accuracy
- Clip mounting




## OVERVIEW TECHNICAL DATA

Device type	Thermostats
Setting range	firm
Contact type	Snap-action contact
Sensor	Thermostatic bimetal
Protection type	IP20
Casing	Plastic to UL94 V-0, light gray
AC/DC	AC;DC
Inrush current	16 A
Inrush current duration	10 s
Switching capacity	AC 250 V: 5 (1.6) A; AC 120 V: 10 (2) A; DC 24-72 V: 30 W
Switching current ohmic	5 A
Switching current 2 ohmic	10 A
Reference voltage ohmic	250 VAC
Reference voltage 2 ohmic	120 VAC
Switching current inductive	1,6 A
Switching current 2 inductive	2 A
Reference voltage inductive maximum	250 VAC
Reference voltage 2	120 VAC
Switching current dc ohmic	1 A
Reference voltage dc ohmic	30 VDC
Minimal switching capacity	0,48 W
Reference voltage	24 V
Switching current	20 mA


Service life	>100000 cycles
Switch-off temperature	25 °C
Switch-off temperature tolerance	± 6 K
Switch-on temperature	35 °C
Switch-on temperature tolerance	± 6 K
Operating temperature	-40 °C - 80 °C
Operating humidity	≤90 % RH
Storage humidity	≤90 % RH
Storage temperature	-45 °C - 80 °C
Torque	0,8 Nm max.
Connection	2-pole clamp: Rigid wire/stranded wire 2.5 mm <sup>2</sup> (AWG 14)
Design	Normally open (NO)
Mounting	Clip for 35 mm DIN rail, EN 60715
Height	47 mm
Width	33 mm
Depth	33 mm
Weight	30 g

TECHNICAL DRAWINGS

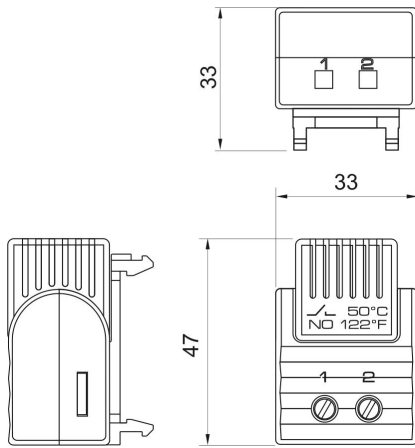


Thermostat  
FTS 111 (NO)

Connection diagram



- Heater
- Filter fan, cooling equipment, signal device

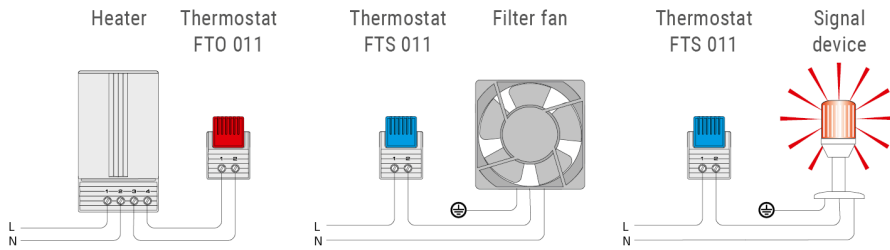

Connection examples