

ENCLOSURE HEATER WITH FAN

HGL 046 | 04641.0-00



The compact fan heater heats the air inside the enclosure or casing to protect against harmful condensation. The convection effect of this resistance heater is maximized by the integrated fan.

- Compact convection heater
- Resistance heating element
- Temperature safety cut-out: overheating protection in the event of fan failure
- Long service life




OVERVIEW TECHNICAL DATA

Device type	Fan heater
Temperature monitoring	Overheating protection in the event of fan failure with automatic reset
Protection class	I
Protection type	IP20
Connection case	Plastic to UL94 V-0, black
Heating element	Resistance heater
Heater element	Aluminium profile, anodised
AC/DC	AC
Operating voltage	230 V
Frequency	50;60 Hz
Heating capacity	400 W
Service life	>50000 h
Surface temperature	< + 167 °F
Operating temperature	-49 °F - 158 °F
Operating humidity	≤90 % rF
Storage humidity	≤90 % rF
Storage temperature	-49 °F - 158 °F
Connection type	Connection terminal
Connection	Internal connection terminal 1.5 mm ² with strain relief
Mounting	Clip for 35 mm DIN rail
Installation position	Airflow direction "in" vertical / connection at the bottom
Height	8.7 in
Width	3.3 in
Depth	3.9 in
Weight	49.4 oz

Note Other voltages on request; Note: according to UL 508A, NITW file on request

TECHNICAL DRAWINGS

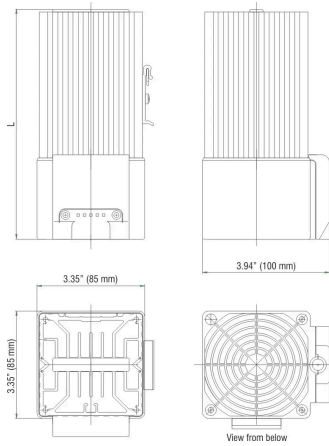

Connection example

