

# FILTER FAN PLUS - SIZE 5 (291 X 291 MM)

FPI 018 | 01874.0-31



Filter fan FPI size 5 (291 x 291 mm) for air conditioning enclosures and casings. Configuration: FPI - airflow direction "in" (standard version: blowing). Optimum air conditioning of your enclosure: The Filter Fan Plus blows cooler outside air into the enclosure. The warmer air inside the enclosure is discharged via the exit filter. The resulting air flow cools the enclosure and protects the components from overheating.

- Only one filter mat required (on the filter fan)
- Easy installation thanks to mounting frame with twist locks
- Effective air circulation
- Accessories: Hose-proof hood to increase the protection type to IP56



## OVERVIEW TECHNICAL DATA

Device type	Filter fan Plus (AC)
Protection class	I
Protection type	IP54
Material hood	Plastic to UL94 V-0, light gray
Filter material	Plastic fibre with progressive structure
Filter mat	G3
Casing	Plastic to UL94 V-0, light gray
AC/DC	AC
Operating voltage	230 V
Frequency	50 Hz
Power consumption	140 W
Axial fan	Fan body aluminium, rotor metal
Cooling airflow rate outlet filter	329.6 cfm
Cooling airflow rate blowing	367.3 cfm
Average emission sound pressure level	70 dB(A)
Service life	>54000 h
Operating temperature	-13 °F - 131 °F
Operating humidity	≤90 % rF
Storage humidity	≤90 % rF
Storage temperature	-40 °F - 158 °F
Torque	0.8 Nm max.
Connection	3-pole clamp 2.5 mm²
Mounting frame	With 4 built-in rotary latches for locking
Height	12.7 in
Width	12.7 in

Depth	7.4 in
Installation depth	6.3 in
Weight	116.4 oz
Mounting cut-out	291 x 291 in
Item number accessories 1	08637.0-00
Item number accessories 2	11874.0-00
Item number accessories 3	08674.0-00
Accessory 1	Replacement filter mat FM 086
Accessory 2	FPI 118 exit filter with air-flap outlet technology
Accessory 3	Water jet protection hood FFH 086
Note	Other voltages on request;Drilling pattern for screw fixing marked on mounting frame.
Protection type UL	NEMA Type 12

### EXIT FILTER - SIZE 5 (291 X 291 MM)

Article number	Filter mat	Height	Width	Depth	Installation depth	Weight
11874.0-00	ISO coarse 55 % according to ISO 16890 (G3), grav. Initial gravimetric arresstance 57 %	12.7 in	12.7 in	3.1 in	1 in	28.2 oz




### FILTER MAT BAG

Article number	packaging_size	Filter mat	Mounting cut-out
08637.0-00	5 Stück	ISO coarse 55 % according to ISO 16890 (G3), grav. Initial gravimetric arresstance 57 %	283x283 in

### HOSE-PROOF HOOD

Article number	material_sealing	cutout_dimension	Height	Width	Depth	Weight
08674.0-00	Silicone, food safe	FPI/FPO 018 291 x 291 in	19.1 in	16.1 in	4.1 in	130.5 oz

TECHNICAL DRAWINGS

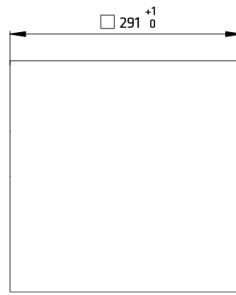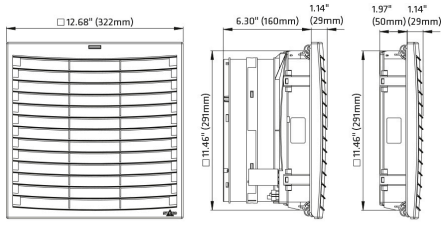

Enclosure cut-out