

# ENCLOSURE HEATER

LTF 065 | 06523.0-00



Compact loop heater based on PTC heating elements for heating casings with electrical or electronic components. The heater can be used to prevent both low temperatures and condensation on built-in components. Fast electrical contacting through pressure clamps.

- Quick installation with clip fixing and pressure clamp
- Low surface temperature
- Double insulated (plastic housing)
- Wide voltage range
- Integrated tamper-proof thermostat
- Heater body in loop design for optimum temperature distribution
- Shock and vibration proof




## OVERVIEW TECHNICAL DATA

Device type	Convection heaters; Integrated control; Touchsafe
Protection class	II
Protection type	IP20
Heating element	PTC resistor (PTC)
Casing	Plastic to UL94 V-0, black and white
AC/DC	AC
Operating voltage	120 V - 240 V
Inrush current	6 A
Frequency	50;60 Hz
Heating capacity	100 W
Switch-off temperature	25 °C
Switch-on temperature	15 °C
Surface temperature	< + 80 °C
Operating temperature	-45 °C - 70 °C
Operating humidity	≤90 % RH
Storage humidity	≤90 % RH
Storage temperature	-45 °C - 70 °C
Connection type	Connection terminal
Connection	2 x pressure clamps for 0.5 - 1.5 mm <sup>2</sup> stranded wire (with wire end ferrule) and 0.5 - 2.5 mm <sup>2</sup> rigid wire
Mounting	Clip for 35 mm DIN rail
Installation position	Airflow direction "in" vertical / connection at the bottom
Height	184 mm
Width	57 mm

Depth	140 mm
Weight	750 g
Note	Surface temperature according to VDE 0100, except upper grid surface; heating capacity measured at +20 °C (+68 °F) ambient temperature; switch-on/off temperature tolerance at +5 K.

## TECHNICAL DRAWINGS

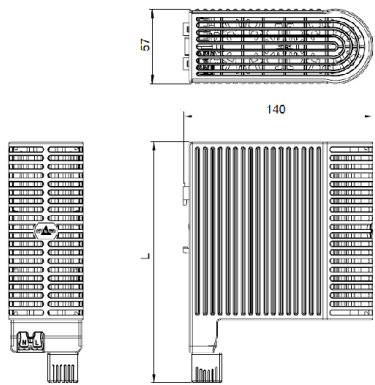

Connection example

